



Euclid 60

LED linear lighting system IP 65



Micro louvre for glare control

Side cable entry box

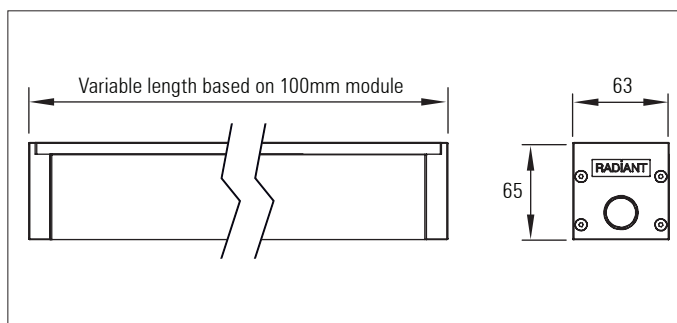

Euclid 60 IP65 with lenses

High power, IP 65 rated LED linear lighting system

Product description:

Exterior wall grazing and wall washing applications

Integral mains voltage AC to DC constant current drivers. 230 V AC input

A wide variety of lens and reflector options can be fitted to the system

A wide range of LED colour temperatures and CRI options are available

Satin black, satin white or any RAL paint colour finish

Custom lengths based on a 100 mm module up to 2 mtrs

Various mounting options and bracket types are available


16 Amp IP67 connectors join strips together on-site

Various dimming options available: 1 - 10, DALI, DMX, and phase


Micro louvre available for glare control

Side, back and end power feed options allow continuous lighting without dark areas - LED pitch is maintained between the individual luminaires


Adjustable angle bracket

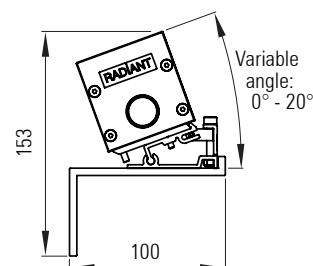

Turn Allen Key to adjust angle



Fixed angle bracket

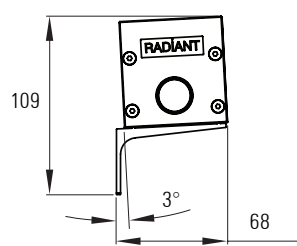

Up to 6,000 Lumens per mtr

Product Code	IP	No. of LEDs per mtr.	Length (mm)	Colour Temp. (K)	CRI	Optics	Bracket Type	Cover	Feed	Finish
EUCLID 60	65	40=25mm 20=50mm LED spacing	100mm -increments of 100mm up to- 2,000mm	27=2,700k 30=3,000k 35=3,500k 40=4,000k 45=4,500k 50=5,000k RGB RGBW RGBA Dynamic white	80 90	N, M, W, E, Contact Radiant for more options and for photometric data	Adjustable Fixed	Clear Frosted	End Back	Black White Any RAL-colour